




# ineo 4752

- > Black & white A4 multifunctional
- > Up to 47 ppm

Datasheet ineo 4752

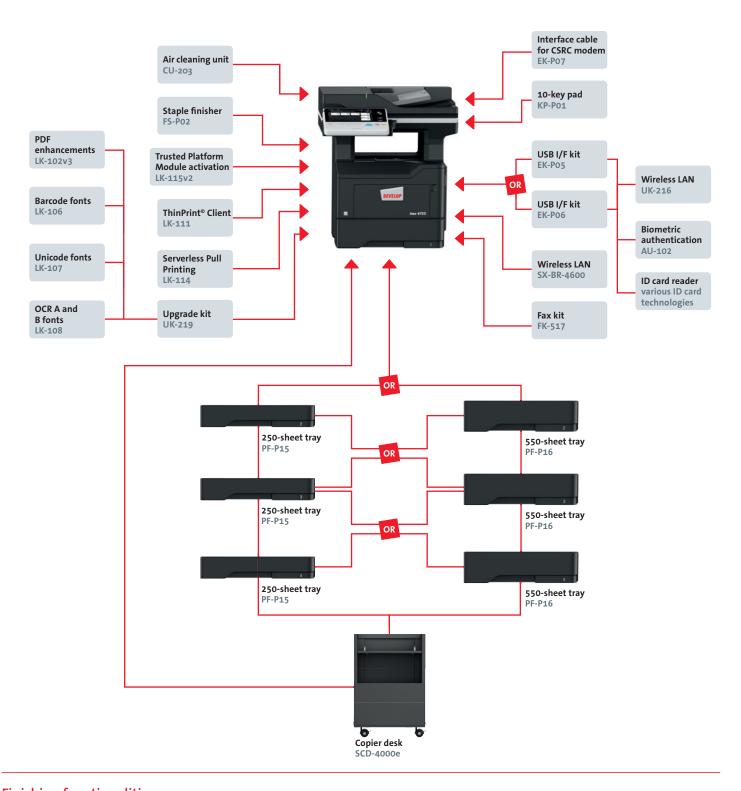

## **Finishing functionalities**





Corner stapling

Duplex

# Description

ineo 4752	A4 multifunctional with 47 ppm b/w. Standard ineo print controller with PCL, PostScript and XPS support. Paper capacity of 550 sheets and 100-sheet manual bypass. Automatic dual-scan document feeder and duplex unit standard. 2 GB memory, 250 GB hard disk and Gigabit Ethernet.
PF-P15 Paper tray	A5–A4, 250 sheets, 60–120 g/m²
PF-P16 Paper tray	A5–A4, 550 sheets, 60–120 g/m²
SCD-4000e Copier desk	Provides storage space for print media, etc.
FS-P02 Staple finisher	20-sheet corner stapling
FK-517 Fax kit	Super G3 fax; digital fax functionality
KP-101 10-Key pad	For use instead of touchscreen
EK-P05 USB I/F kit	USB keyboard connection
EK-P06 USB I/F kit	USB keyboard connection, Bluetooth
EK-P07 Interface cable	GPRS modem connection for CSRC
for CSRC modem	

AU-102 Biometric authentication Finger vein scanner	
ID card reader	Various ID card technologies
LK-102v3 PDF enhancements	PDF/A (1b), PDF encryption, digital signature
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-111 ThinPrint® Client	Print data compression for reduced network impact
LK-114 Serverless Pull Printing	Secure and Follow Me printing solution require
	no server application. Host devices require 4 GB
	memory.
LK-115v2 TPM activation	Trusted Platform Module for protection of data
	encryption and decryption
UK-219 Upgrade kit	2 GB memory extension for upgrades
UK-216 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
SX-BR-4600 Wireless LAN	Wireless LAN to network connector
CU-203 Air cleaning unit	Improving indoor air quality by reduced emissions

### **Technical specifications**

#### SYSTEM SPECIFICATIONS

Panel size/resolution	7" / 800 x 480
System memory (standard/max	2) 2 GB/4 GB
System hard disk	250 GB (standard)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11b/g/n (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP;
	HTTPS
Automatic document feeder	Up to 50 originals; A6 – A4; 52 – 120 g/m²;
	automatic dualscan document feeder
Printable paper size	A6-A4; customised paper sizes
Printable paper weight	60-216 g/m²
Paper input capacity (standard/	650 sheets/2,300 sheets
max)	
Paper tray input (standard)	550 sheets; A6 – A4, 60 – 120 g/m²
Paper tray input (optional)	3x 250/550 sheets; A5–A4; 60–120 g/m²
Manual bypass	100 sheets; A6 – A4; custom sizes; 60 – 216 g/m²
Automatic duplexing	A4; 60-90 g/m²
Finishing modes	Group/sort; staple (optional)
Output capacity	Max.: 250 sheets
Stapling (optional)	Max.: 20 sheets
Copy/print volume (monthly)	Rec.: 7,000 pages
	Max.: 150,000 pages
Toner lifetime	25,000 pages
Imaging unit lifetime	60,000 pages
Power consumption	220 – 240 V/50/60 Hz; Less than 660 W
System dimensions (W x D x H)	490 x 521 x 546 mm
System weight	Approx. 24 kg (without options)

#### COPIER SPECIFICATIONS

Copying process	Electrostatic laser
Copy/print speed A4	Up to 47 ppm
Autoduplex speed A4	Up to 33 ppm
1st copy out time	6.5 sec.
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	Max. A4
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	Electronic sorting; multi-job; adjustments (contrast,
	sharpness, image density); proof copy; interrupt
	mode; separate scan; sort/group; combination; orig-
	inal selection; ID card copy; 2-in-1; 4-in-1; 8-in-1

#### PRINTER SPECIFICATIONS

Print resolution	600 x 600 dpi; 1,200 x 1,200 dpi
Page description language	PCL 6 (XL 3.0); PCL 5; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 7 (32/64); Windows 8 /8.1 (32/64);
	Windows 10 (32/64); Windows Server 2008 (32/64);
	Windows Server 2008 R2; Windows Server 2012;
	Windows Server 2012 R2; Windows Server 2016;
	Macintosh OS X 10.9 or later; Linux; Unix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Print functions	Direct print of TIFF; XPS; PDF (v1.7) and OOXML
	(DOCX, XLSX, PPTX); secure print; proof print;
	overlay; n-up; booklet page order; watermark
Mobile Printing	AirPrint (iOS), Mopria (Android), ineoPRINT (iOS/
	Android/Windows 10 Mobile); Mobile Authentication
	and Pairing (Android & iOS)
	optional: Google Cloud Print; Wifi Direct

#### SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 47/30 ipm in simplex
	Up to 94/60 ipm in duplex
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-
	Home); Scan-to-FTP; Scan-to-HDD; Scan-to-USB;
	Scan-to-WebDAV; Scan-to-URL; Network TWAIN scan
File formats	TIFF, PDF, Compact PDF, JPEG, XPS, PDF/A (opt.),
	Compact XPS, PPTX, Linearized PDF, Encrypted PDF
Scan destinations	2,100 (single + group); LDAP support
Scan functions	Up to 400 job programs

#### **Technical specifications**

#### **FAX SPECIFICATIONS**

Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax
Fax resolution	Up to 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,100 (single + group)
Fax functions	Time shift; PC-Fax; fax forwarding; up to 400
	program dials

#### SYSTEM FEATURES

Security	ISO15408 Common Criteria (in evaluation); IP filtering and port blocking; SSL2; SSL3 and TLS1.0 network communication; IPsec support; IEEE 802.1x support; user authentication; secure print; Kerberos; hard disk
	overwrite (8 standard types); hard disk data encryp-
	tion; copy protection (print only)
Accounting	Up to 1,000 user accounts; Active Directory support
	ID card authentication optional
Software	store+find (opt.); convert+share (opt.); Personal
	Applications (opt.); Device Manager (opt.); Data
	Administrator (user accounts & cost centres); Card
	solutions (opt.); Unix/Linux support; SAP support;
	EveryonePrint (opt.)





























Konica Minolta Business Solutions Europe GmbH Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu



Parkboulevarden 31 8920 Randers NV

(+45) 71 99 97 72 info@dokupartner.dk For more information regarding the ineo 4752 please refer to the respective product homepage



- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations
- · The stated life expectancy of each consumable is based on specific operating conditions such as page  $coverage\ for\ a\ particular\ page\ size\ (5\%\ coverage\ of\ A4).\ The\ actual\ life\ of\ each\ consumable\ will\ vary$ depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- · Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- $\hbox{-} All \ brand \ and \ product \ names \ may \ be \ registered \ trademarks \ or \ trademarks \ of \ their \ respective \ holders \ and$ are hereby acknowledged.

